

# HYUNDAI SOLAR MODULE

**VG**  
SERIES

**PERC Shingled**

HiE-S390VG HiE-S395VG HiE-S400VG  
HiE-S405VG HiE-S410VG




Shingled  
Technology



For Both  
Residential &  
Commercial  
Applications



More Power  
Generation  
In Low Light



**M6 PERC Shingled**

M6 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



**Anti-LID / PID**

Both LID(Light Induced Degradation) and PID(Potential Induced Degradation) are strictly eliminated to ensure higher actual yield during lifetime.



**Mechanical Strength**

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



**Reliable Warranty**

Global brand with powerful financial strength provide reliable 25-year warranty.



**Corrosion Resistant**

Various tests under harsh environmental conditions such as ammonia and salt-mist passed.



**UL / VDE Test Labs**

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

**Hyundai's Warranty Provisions**



**25-Year Product Warranty**  
• On materials and workmanship  
**EU and AU Only**



**25-Year Performance Warranty**  
• Initial year: 98.0%  
• Linear warranty after second year:  
with 0.55%p annual degradation,  
84.8% is guaranteed up to 25 years.

**About Hyundai Energy Solutions**

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing high-quality PV products to more than 3,000 customers worldwide.

**Certification**



## Electrical Characteristics

		Mono-Crystalline Module(HiE-S_VG)				
		390	395	400	405	410
Nominal Output(Pmpp)	W	390	395	400	405	410
Open Circuit Voltage(Voc)	V	46.3	46.3	46.4	46.5	46.6
Short Circuit Current(Isc)	A	10.87	10.92	10.97	11.02	11.07
Voltage at Pmax(Vmpp)	V	38.5	38.5	38.6	38.7	38.8
Currnt at Pmax(Imp)	A	10.13	10.26	10.36	10.47	10.57
Module Efficiency	%	19.9	20.2	20.4	20.7	20.9
Cell Type	-	PERC Mono-Crystalline Silicon Shingled				
Maximum System Voltage	V	1,500				
Temperature Coefficiency of Pmax	%/°C	-0.34				
Temperature Coefficiency of Voc	%/°C	-0.27				
Temperature Coefficiency of Isc	%/°C	0.04				

\*All Date at STC (Standard Test Conditions). Above data may be changed without prior notice.

\*Tolerance of Pmax:0~+5W.

\*Performance deviation of Voc[V], Isc [A], Vm [V], and Im[A]:±3%.

## Mechanical Characteristics


Dimensions	1,719 × 1,140 × 35mm (L × W × H)		
Weight	22kg		
Solar Cells	340 Cells, PERC Mono-crystalline Shingled (166 × 166mm)		
Output Cables	Length 1,500mm, 1 × 4mm <sup>2</sup>	Connector	Stäubli : MC4-Evo2
Junction Box	Rated Current : 20A, IP67, TUV&UL		
Construction	Front Glass: White toughened safety glass, 3.2mm Encapsulation: EVA (Ethylene-Vinyl-Acetate)		
Frame	Anodized aluminum		

## Installation Safety Guide



- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	42.3°C ( ±2°C )
Operating Temperature	-40 ~ 85° C
Maximum System Voltage	DC 1,500 / 1,000 (IEC)
Maximum Reverse Current	20A
Maximum Surface Load Capacity	Front 5,400 Pa Rear 2,400 Pa

## Module Diagram (Unit: mm)

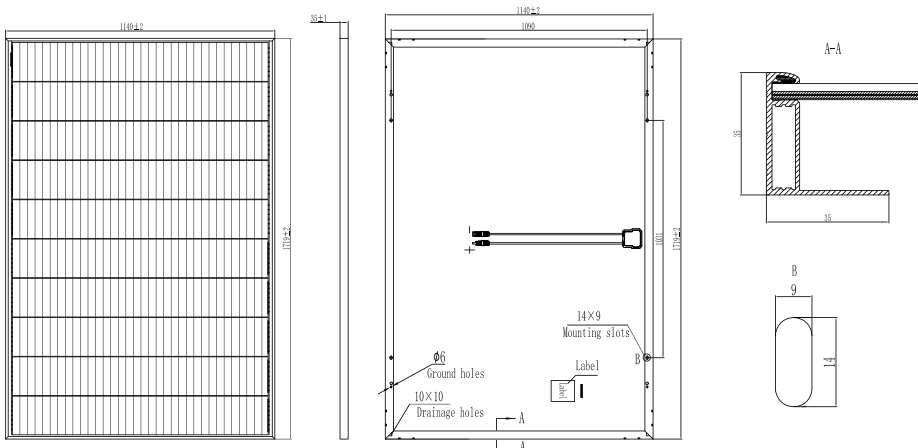

## I-V Curve



Manufactured in China

**HYUNDAI**  
ENERGY SOLUTIONS



Sales & Marketing  
sales@hyundai-es.co.kr

Printed date: 08/2021